

**Symbol LS Series Scanner**  
**Bar Code Programming Guide**  
Small Tool Tracking by  
Landmark Data Systems, Inc.

**Your enclosed bar code scanner does NOT need to be programmed; it comes programmed prior to being sent to you. Just connect your scanner to your PC and it will work with your Small Tool Tracking software.**

From time to time your bar code scanner *may* lose its programming and you will need to re-program it. The following instructions are to be used ONLY if your scanner has stopped working due to possible programming loss. Do NOT use the enclosed 'Symbol Quick Start Guide' pamphlet; you will only need to follow the Landmark Data System's instructions below.

To re-program the scanner you will scan each bar code according to the instructions below. During the programming process the scanner will make a series of beeps. When the scanner has accepted the program function, the last scan will give you a short jingle.

To program the data format, scan the following...

**\*Cordless Scanners ONLY** - *Scan the Bar Code Located on the Base of Your Scanner 1st*  
**Scan Options**  
<Prefix><Data><Suffix>  
**Enter**


To program the prefix value, scan the following...

**Scan Prefix**  
1  
0  
0  
1

To program the suffix value, scan the following...

**Scan Suffix**  
1  
0  
0  
2

**\*Cordless Scanners ONLY -**  
*Scan the bar code located on the base of your scanner FIRST.*

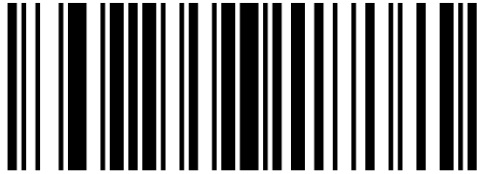

**Scan Options**



**<PREFIX> <DATA> <SUFFIX>**



**Enter**



**Scan Prefix**



**Scan Suffix**



**1**



**1**



**0**




**0**




**0**



**0**

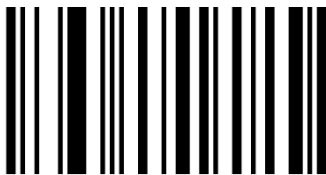

**1**

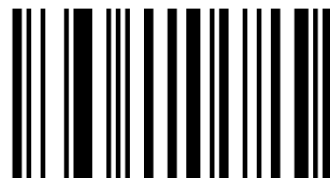

**2**